
Dissolved Air Flotation (DAF) Unit
Process Flow Diagram

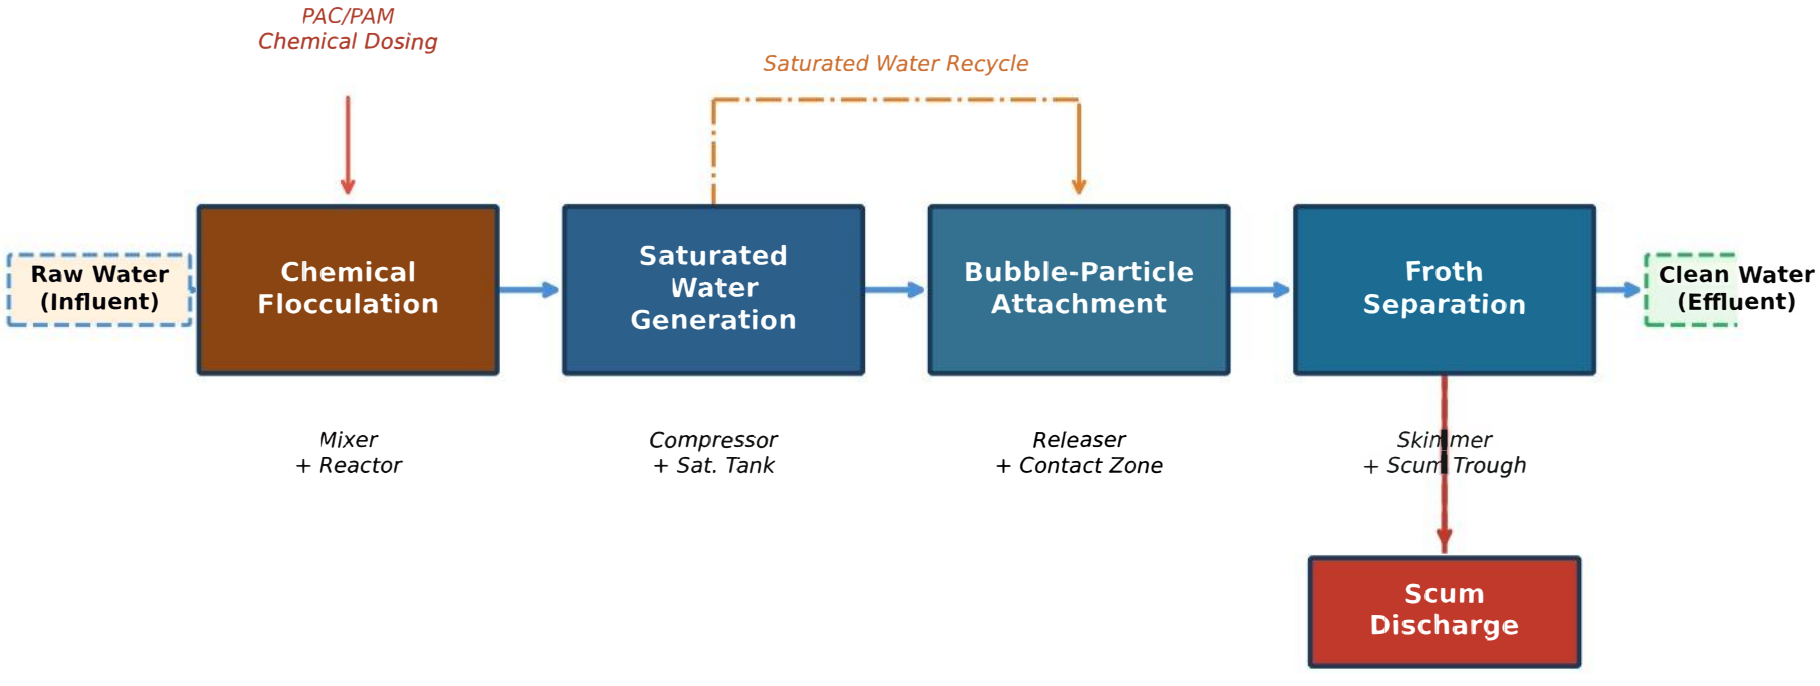

Typical Influent: CODcr <= 600 mg/L, BOD5 <= 200 mg/L, SS <= 400 mg/L, Oil <= 50 mg/L